



MishaDecor



VINYL FLOOR PLANK

SPC FLOOR PLANK



Cat. 23 Focus on floor decoration material

Foshan misha decor materials co., ltd
Add: 1309 jianmei building, Teng long
road, Nanhai district, Foshan city,
Guandong, China
Zip: 528231
Email: info@mishadecor.com

 Company Profile	1
 Qualification/Certification	2
 Performan	3
 Vinyl flooring	4
Dry bak/self adhesive	4
Regular colors	5-7
Loose lay	8
Regular colors	9-10
 SPC flooring	11
Regular colors	12-14
 Flooring Accessories	15
 Maintenance/support/installation	16

Company Profile


Mishadecor is mainly selling vinyl floor plank, spc floor, woven floor and floor accessories, which is widely used in home decoration, office buildings, shopping malls, fitness centers, apartments, light industry and other places. The products are sold in more than ten countries and regions including China, Asia and South America. we have a group of dedicated production and sales team, to provide customers with quality service. As the inventor and creator of new building materials, we have the responsibility to create unlimited comfortable green space for human beings with limited natural resources.

There we have two production base in Guangdong & Shandong, can satisfy customers different flooring requirements and ensure quality. As we are cooperating retailers in customers local market, we have good experience on stock producing schedule, shipping plan with our customers. Because we believe, then we meet.



Qualification

As quality is the first to us, with exporting hundred of containers, we build a complete quality control system. Our QC team can inspect products parameters at first to compare with customer's requirements, with inspect item of UV coating, thickness, wear layer thickness, and color difference. Second we will make sure with safety loading and fix the pallets well into container, ensure container arrive port without any surprises. Because customer's believe, we are improving day by day with our customers.

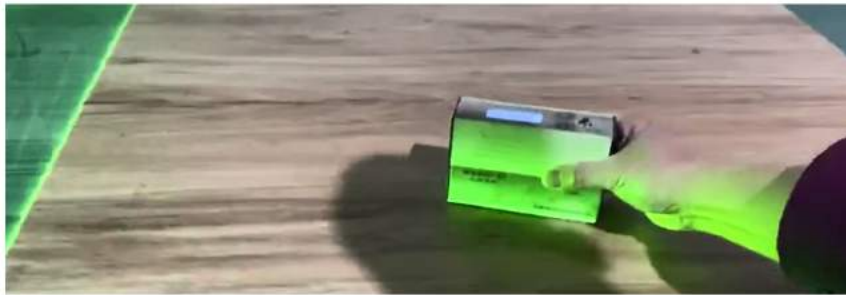

surface gloss test



surface peeling test



resistance test

Certification

Before selling flooring product, we have tested the products via SGS with ISO standard, it's available to our customers for their selling for personal end-user, projectors, etc... We deeply understand the important with products safety, not only update the products performance and function periodically, but satisfy to customers with different requirements in their local market construction standard. Because we are connecting to various customers, we are taking our duty.

SGS

Test Report No. SHAECC210016301 Date: 22 Jul 2022 Page 2 of 5

Test Results:

Task/Item Description:

Specimen No. **SGS Sample ID** Description
 581 SHAECC210016301 Grey/black solid wood

Remarks:

- (1) 1 mg/kg = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (= MEL)
- (4) * = Not Registered

EN 71-3:2019(A1:2021) - Migration of certain elements (Category II) for screw-fixed materials

Test Method: With reference to EN 71-3:2019(A1:2021), analysis was performed by ICP-OES, IC-UV or LO ICP-MS

Test Item(s)	Unit	MDL	Result
Soluble Chromium (Cr VI)	0.033 mg/kg	0.020	ND
Soluble Lead (Pb)	21 mg/kg	5	ND
Soluble Arsenic (As)	580 mg/kg	10	ND
Soluble Arsenic (As)	47 mg/kg	10	ND
Soluble Barium (Ba)	10350 mg/kg	50	ND
Soluble Cadmium (Cd)	17 mg/kg	5	ND
Soluble Chromium (Cr) (Cr VI)	480 mg/kg	5	ND
Soluble Mercury (Hg)	94 mg/kg	10	ND
Soluble Selenium (Se)	480 mg/kg	10	ND
Soluble Boron (B)	14000 mg/kg	100	ND
Soluble Cobalt (Co)	130 mg/kg	10	ND
Soluble Manganese (Mn)	18000 mg/kg	500	ND
Soluble Strontium (Sr)	84000 mg/kg	500	ND
Soluble Zinc (Zn)	48000 mg/kg	500	ND
Soluble Copper (Cu)	7700 mg/kg	100	ND
Soluble Aluminum (Al)	26300 mg/kg	500	ND
Soluble Nickel (Ni)	800 mg/kg	10	ND
Soluble Tin (Sn)	100000 mg/kg	5	ND
Soluble Organic Tin	12 mg/kg	-	ND

SGS

Test Report No. SHAECC210016301 Date: 22 Jul 2022 Page 5 of 5

Sample photo:

SHAECC210016301

SGS authenticates the photo on original report only

*** End of Report ***

intertek

Test Report

Issue Date: 2021-05-25 Intertek Report No.: 2102041254F-001

Test Name, Method and Result:

Class	Requirement	Test	Result	Remarks	Verdict
4	Requirement				
4.1	Reaction to fire	The floor covering shall be tested and classified according to the requirements of EN 13501-1 and the resulting class and subclass (as appropriate to the class (s)) shall be declared.	EN 13501-1:2018 Class "A1-s1, d0" (EN 13501-1:2018 Class "A1-s1, d0")	Refer to test report in Appendix B (Issue by NB No. 3323)	Pass
4.2	Flammable emission	When formaldehyde-containing materials have been tested to the product as a part of the production process, the product shall be tested and classified into one of the classes E1 or E2.	EN 13501-1:2018 Class "A1-s1, d0" (EN 13501-1:2018 Class "A1-s1, d0")	Refer to test report in Appendix B (Issue by NB No. 3323)	Pass
4.3	Slip resistance	If a claim for slip resistance is made, the floor covering intended to be used in dry and non-contaminated conditions shall have a dynamic coefficient of friction of ≥ 0.40 when tested in Factory under dry conditions in accordance with EN 12881 and shall be declared as technical class U6.	Class U6 EN 12881:2018 Class "A1-s1, d0" (EN 12881:2018 Class "A1-s1, d0")	Dynamic coefficient of friction 0.44	Pass

intertek

Test Report

Issue Date: 2021-05-25 Intertek Report No.: 2102041254F-001

Appendix B - NB Report

INSTITUTE FOR TESTING AND CERTIFICATION

REPORT OF ASSESSMENT OF PERFORMANCE

Product: Interspace PVC floor covering, Type: Luxury Vinyl Flooring, Identification: 1500mm x 1800mm x 6.0mm (Class II)

Assessed by: Shandong Goodstrong Decoration Materials Co., Ltd (Shandong Goodstrong Decoration Materials Co., Ltd)

Assessed on: 2021-05-21

Number of pages: 8



2102041254F-001

► Applications Places



PERFORMANCE



Chemical Resistant



Anti Termite



Easy Maintenance



Waterproof



Stain Resistant



Antislip



Abrasion Resistant



All-Around Application



Flexible Material



Precisely Cut



Multiple Combination



Uneasily Scratched

► Process of getting our products

-1-

Free samples are available tell us what you need

-2-

Talk abtou products confirm Colors, quantities, specification, etc...

-5-

Load container after receiving 70% balance, ship goods from China

-4-


Lead time is around 15-20 days for 20ft container, send schedule to you

-3-

Confirm performa invoice, if no problem we need 30% deposit inadvanced

Vinyl Flooring

-Dry back type

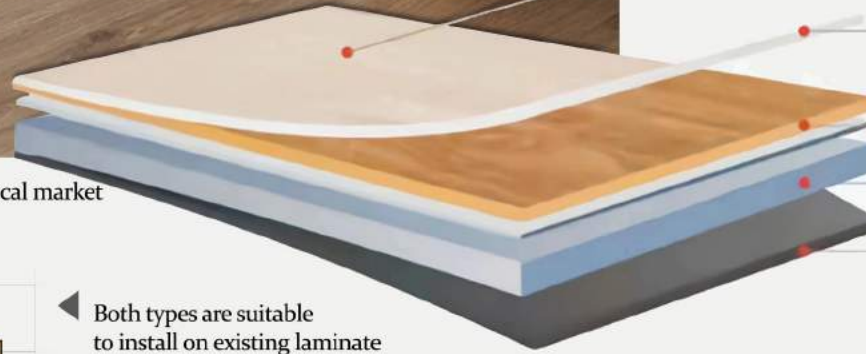

UV coating layer


Wear layer

PVC film

Middle layer

Bottom layer

▲ Advise to purchase pvc floor glue in local market



Regular style

Both types are suitable to install on existing laminate floor, timber floor, ceramic type, etc... Each installation please check with experienced installer, or installed by your own under well-instruction.



-Self adhesive type

UV coating layer



Wear layer

PVC film

Middle layer

Bottom layer

Glue layer

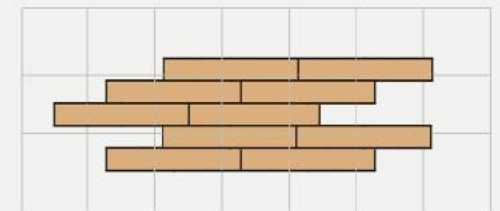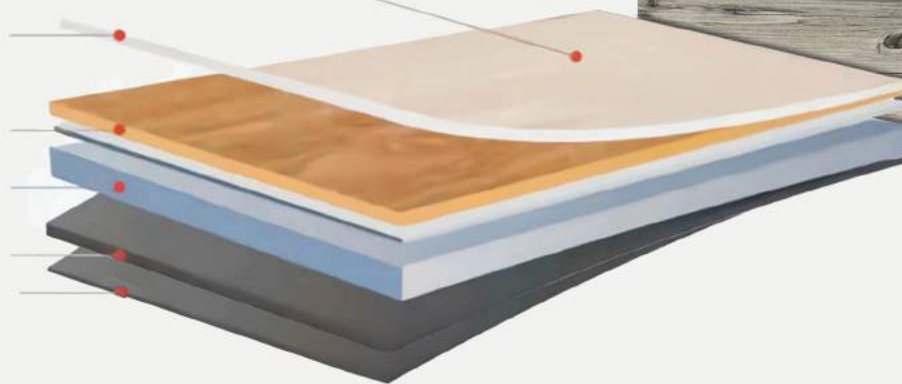

Boat style



Termite resistance



100% recyclable and eco friendly, saving forest



Weather resistant from 0°C to 60°C



Water resistance and mildew proofing



No need heavy clean



Excellent UV resistance



DIY and easy installation



Formaldehyde emission: E0 (the highest standard)



Regular stock colors

Size option-1: 1220*180mm*1.8mm/2.0mm/2.5mm/3.0mm

Wooden grain

Size option-2: 914.4*152.4mm*1.8mm/2.0mm/2.5mm/3.0mm

Focus on floor decoration materials



062 Grey



001 Carbon



003



011



023



024



028 Brown



005 Coco



◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching



Scan with qr code for widely choosing on colors, or copy the link https://www.720yun.com/t/34vk6w7yOdl?scene_id=102781854

▶ Colors are available on dry back type & self adhesive type



Regular stock colors

Size option-1: 1220*180mm*1.8mm/2.0mm/2.5mm/3.0mm

Wooden grain

Size option-2: 914.4*152.4mm*1.8mm/2.0mm/2.5mm/3.0mm

Focus on floor decoration materials



009 White



026 Ash



025 Ebony



113



121



013



109



258



308



097



041



112



◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information
◀ If you have own color or project color, welcome to contact us for matching



Scan with qr code for widely choosing on colors, or copy the link https://www.720yun.com/t/34vk6w7yOdl?scene_id=102781854

▶ Colors are available on dry back type & self adhesive type



Regular stock colors

Size option-1: 1220*180mm*1.8mm/2.0mm/2.5mm/3.0mm

Wooden grain

Size option-2: 914.4*152.4mm*1.8mm/2.0mm/2.5mm/3.0mm

Focus on floor decoration materials



137



114



116



012



233



014



039



089



069 Honey



324 Golden



074 Wenge




◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching





Scan with qr code for widely choosing on colors, or copy the link https://www.720yun.com/t/34vk6w7yOdI?scene_id=102781854


▶ Colors are available on dry back type & self adhesive type

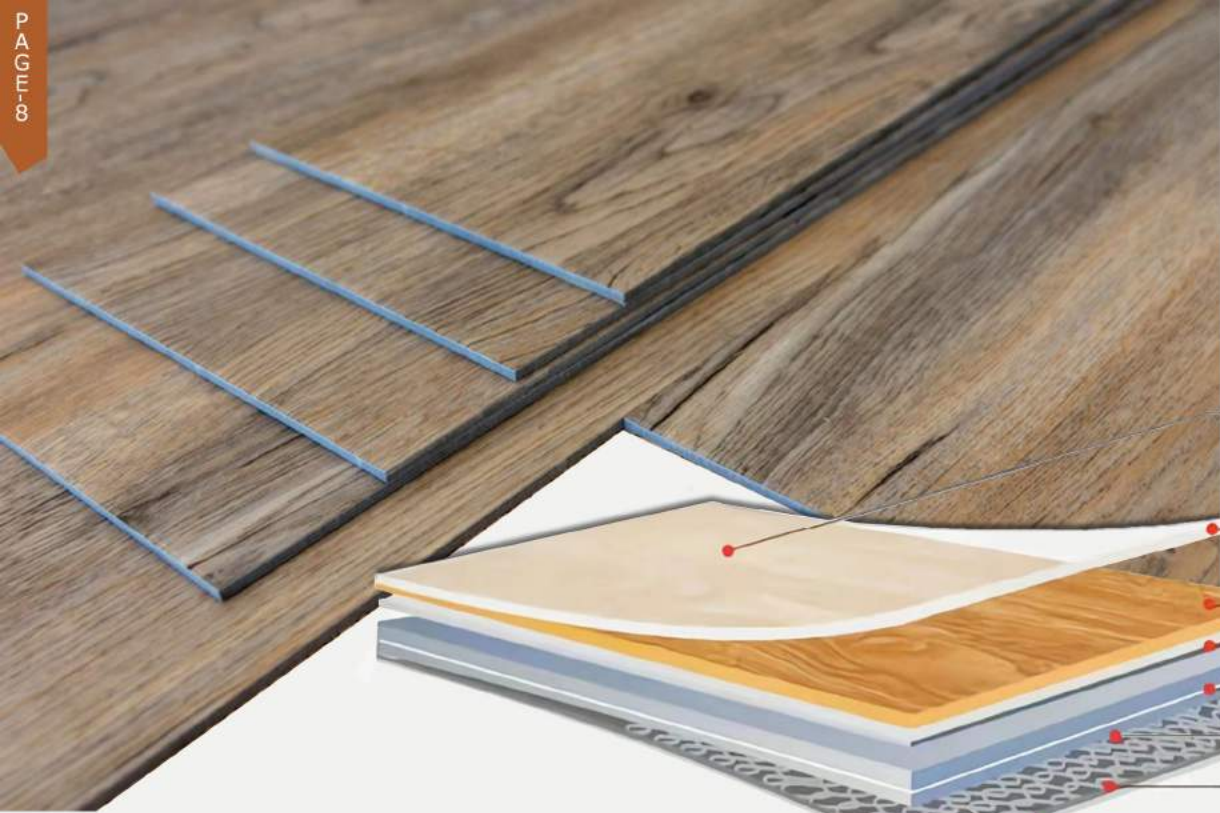

-Loose lay type

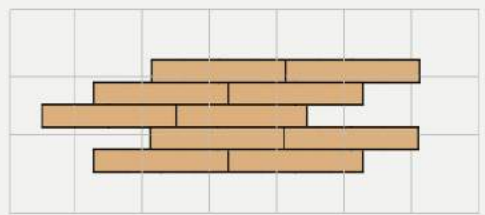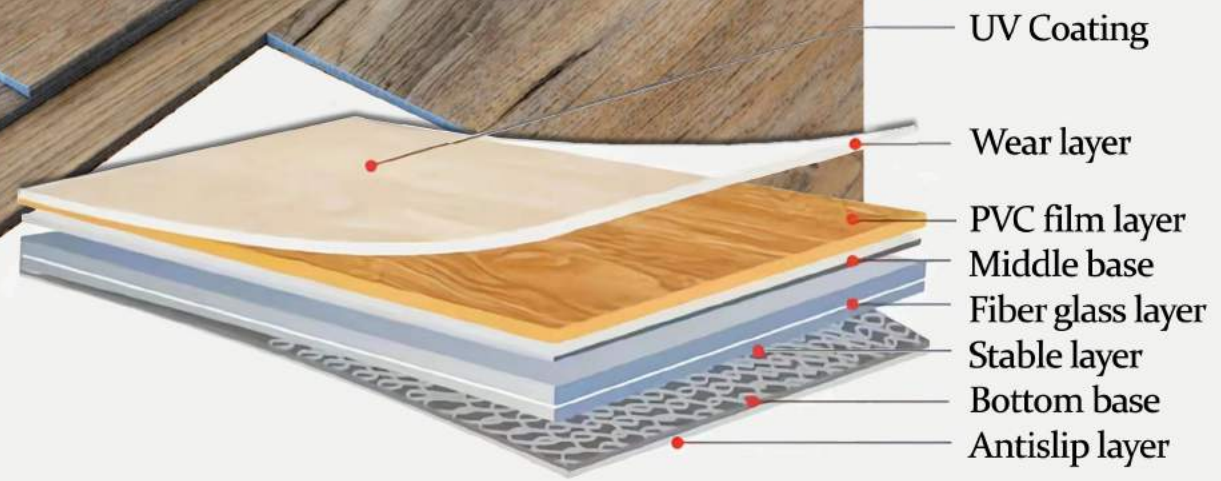


Boat style

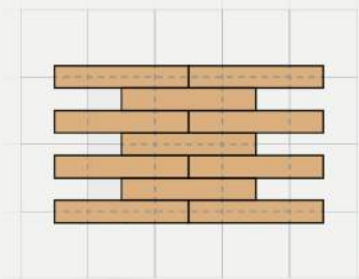

Regular style

Antislip texture design

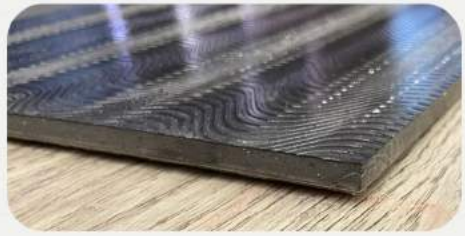

- ▶ Glue free/Only lay down the flooring on your existing leveled floor
- ▶ Installation should be under well-trained or instruction



Termite resistance



100% recyclable and eco friendly, saving forest



Weather resistant from 0°C to 60°C



Water resistance and mildew proofing



No need heavy clean



Excellent UV resistance



DIY and easy installation



Formaldehyde emission: E0(the highest standard)



Regular stock colors

Size option-1: 1220*180mm*5.0mm/6.0mm

Wooden grain

Size option-2: 914.4*152.4mm*5.0mm/6.0mm

Focus on floor decoration materials



LY-01



LY-02



LY-03



- ◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information
- ◀ If you have own color or project color, welcome to contact us for matching
- ✉ info@mishadecor.com

▶ Colors are available on loose lay type



LY-04



LY-05



Regular stock colors

Size option-1: 1220*180mm*5.0mm/6.0mm

Wooden grain

Size option-2: 914.4*152.4mm*5.0mm/6.0mm

Focus on floor decoration materials



LY-06



LY-07



LY-08



- ◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information
- ◀ If you have own color or project color, welcome to contact us for matching

► Colors are available on loose lay type






LY-09




SPC flooring

-Click lock system

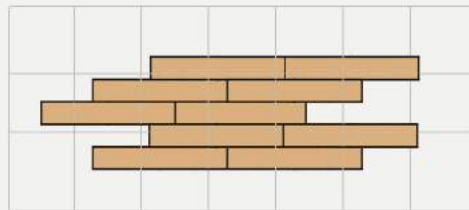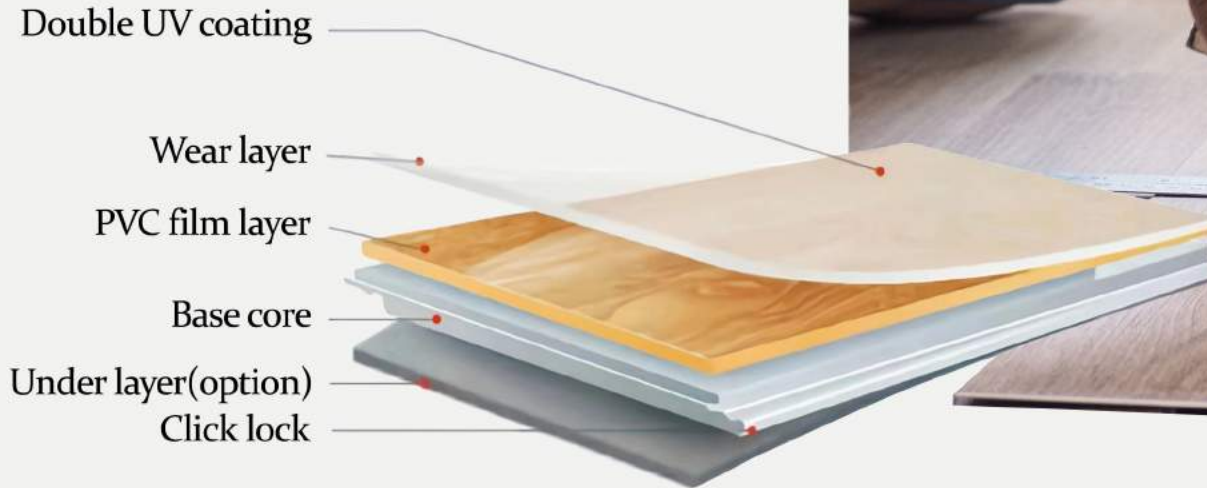

◀ For the click lock system, flooring installation is becoming easily. Reduces the cost of labor, economic choose for residential and commercial.

◀ Two types of installation are normal installation, please install it under well-trained or instruction. When the flooring tolerance is too large at a certain position, it is necessary to reposition the gap.



◀ For purchasing this click flooring, always need special size 640*128mm, 900*150mm.

◀ This type of installation is special installation, please install via professional installer.

⌚ 4mm spc click flooring with quality assurance of 15 years light commercial, 20 years of residential.

⚠ Notes: Pictures in this catalogue for reference only, because screen of devices are different, colors show different on different devices.(this catalogue color is based on 75% lightness reach exact color). Please consult with the real products if you need to confirm in real.



Termite resistance



100% recyclable and eco friendly, saving forest



Weather resistant from 0°C to 60°C



Water resistance and mildew proofing



No need heavy clean



Excellent UV resistance



DIY and easy installation



Formaldehyde emission: E0(the highest standard)



Regular stock colors

Regular size: 1220*180mm*3.5mm/4.0mm/5.0mm/6.0mm

Wooden grain

Herringbone size: 640*128*3.5mm/4.0mm/5.0mm/6.0mm

Focus on floor decoration materials



S236



S287



S271



S001



S682

▶ Customized box design & package are available, please consult for details.



- ▶ Colors are available on regular spc flooring & herringbone spc flooring.
- ▶ Other size, thickness are available.
- ▶ Made of 100% Virgin materials, no expansion with good installation.



S001



S051



S682



S929



S904



S905



S506



S061



S942



S912



S201



S919



S207



S236



S203



S222



S937



S260



Regular stock colors

Regular size: 1220*180mm*3.5mm/4.0mm/5.0mm/6.0mm

Wooden grain

Herringbone size: 640*128*3.5mm/4.0mm/5.0mm/6.0mm

Focus on floor decoration materials



S915



S204



S916



S936



S955

▶ Customized box design & package are available, please consult for details.



- ▶ Colors are available on regular spc flooring & herringbone spc flooring.
- ▶ Other size, thickness are available.
- ▶ Made of 100% Virgin materials, no expansion with good installation.



S053



S061



S062



S271



S902



S909



S914



S915



S916



S922



S926



S936



S941



S948



S504



S205



S214



S216



Regular stock colors

Regular size: 1220*180mm*3.5mm/4.0mm/5.0mm/6.0mm

Wooden grain

Herringbone size: 640*128*3.5mm/4.0mm/5.0mm/6.0mm

Forcus on floor decoration materials



S065



S052



S913



- ▶ Customized box design & package are available, please consult for details.
- ▶ Colors are available on regular spc flooring & herringbone spc flooring.
- ▶ Made of 100% Virgin materials, no expansion with good installation.
- ▶ Other size, thickness are available.



S003



S022



S026



S052



S067



S923



S924



S940



S220



S224

Flooring accessories

-Skirting type



PVC Skirting 85mm
Advantage of low cost & easy installation, durable and nice looking.



SPC Skirting 90mm
Advantage of tough design & easy installation, durable and elegant looking.



PS Skirting 100mm
Advantage of pure color design & easy installation, durable and elegant looking.



► Other designs or flooring accessories if it's needed, please consult for details.

-Acrylic & Silicon

ACRYLIC CAULK SEALANTS



Description:
Acrylic based, one component, paintable, flexible, filling and bonding material.

Application area Description:
Used indoor and outdoor for repairing small cracks and grouting. PVC, aluminium, closets, tiles, ceramics, joints, connections and installation of wooden panels. Sound, water and dust insulation of vehicles.

- Paintable crackproof flex sealant that seals joints up to 3 in.
- Formulated to stretch over 600% without losing adhesion
- Ideal for general purpose, interior and exterior projects

PU LIQUID NAIL



POLYURETHANE BASED:
PU Liquid Nail is one part, solvent-free, moisture curing polyurethane based construction adhesive with outstanding resistance to water, heat and weathering conditions.

Fields of Application:
Variety of materials can be bonded without nails and screws. Powerful bonding of wood products chipboard, plywood, staircase renovation, corner connections in metal door, fire proof fibreboard and plasterboard, mouldings, doors and window frames, plaster moldings, corniches, ceiling accessories, wooden wardrobes, bonding and insulating of expanded polystyrene and polyurethane sheets, windows, facades, stones, natural stones, bricks and ceramics, aluminium, stainless steel, galvanised steel, copper, PVC and reinforced plastics.

WATERPROOF

Maintenance/support/installation

PVC Vinyl flooring/Spc flooring

Our product is provided with a protective layer of UV coating that protects against intrusion of dirtiness and makes its maintenance easier. After installation, you only need to clean the floor with a damp mop with cleaning agent suitable for PVC floors with UV protective layer. No other lacquering or waxing is necessary. In specific cases of use with high load factor or where extreme maintenance conditions are imposed, we suggest applying another protective layer of suitable agent for vinyl floors with UV protective layer. Use agents suitable for PVC with wear layer only. Follow instructions of the manufacturer of agents and possibly consult them with technical advisors. For regular cleaning, do not use any aggressive agents or agents reducing surface tension of water (e.g. regular detergents, agents with abrasives, alkalis or high content of organic solvents and degreasing substances). Dirtiness behaves as sandpaper and may damage your floor! Dust and dirt are removed manually using the right means (dry sweeping mop, vacuum cleaner) and methods (sweeping or vacuuming). Perform regular cleaning under dry or wet conditions using suitable neutral agents.



Spilled liquids must be wiped away immediately



Easy to clean dust with different methods



Easy to clean dust with different methods



Easy to clean dust with different methods

Online support

Whether you are in need of further product or technical specifications, have a query about our ranges or just require some interior design inspiration, we have a variety of online tools you can navigate through easily to find exactly what you are looking for.




Contact us via our homepage or cell phone number



Free sample

We provide all series of flooring samples free of charge except delivery cost, if necessary, please contact us

Different installation style on plank

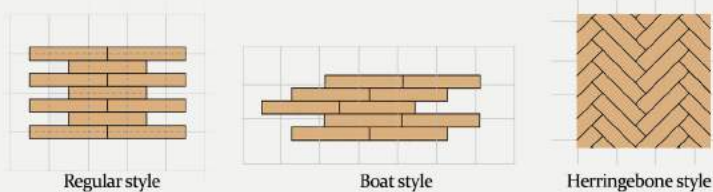

The situation of existing floor should be



Installation

Home decoration environment, with small single space area, which is suitable to install pvc/spc flooring.

First, choose the appropriate flooring scheme according to the selected product color and pattern.

Before flooring, the installation personnel should measure the length and width of the site and select a flooring process based on the actual conditions.

When flooring, start from the middle of the room, or floor from the side of the most important reference wall. Before formal flooring, conduct pre-flooring to determine the flooring direction, and then floor from parallel to the wall until the last row.

For places with heavy traffic, local microadhesive installation or double-sided adhesive tape installation can be selected in this area. When the one-way length exceeds 6 meters, adhesive or double-sided adhesive tape with a width of 50cm can be applied at the bottom, perpendicular to the flooring direction of the floor, as a local fixation to use.

Tree type content



Oak



Pine wood



Teak wood



Walnut



Maple wood



Eucalyptus



Cherry



Elm wood

► Stock colors are based on the above wood type to make different designs.

