



MishaDecor

VINYL FLOOR PLANK

SPC FLOOR PLANK

Cat. 24 Focus on floor decoration material


Foshan misha decor materials co., ltd
Add: 1309 jianmei building, Teng long
road, Nanhai district, Foshan city,
Guandong, China
Zip: 528231
Email: info@mishadecor.com

 Company Profile	1
 Qualification/Certification	2
 Performan	3
 Vinyl flooring	4
Dry bak/self adhesive	4
Regular colors	5-7
Lvt click flooring	8
Regular colors	9-10
 SPC flooring	11
Regular colors	12-14
 Flooring Accessories	15
 Maintenance/support/installation	16

Company Profile

Mishadecor is mainly selling vinyl floor plank, SPC floor, LVT floor and floor accessories, which is widely used in home decoration, office buildings, shopping malls, fitness centers, apartments, light industry and other places. The products are sold in more than ten countries and regions including China, Asia and South America. We have a group of dedicated production and sales team, to provide customers with quality service. As the inventor and creator of new building materials, we have the responsibility to create unlimited comfortable green space for human beings with limited natural resources.

There we have two production bases in Guangdong & Shandong, can satisfy customers' different flooring requirements and ensure quality. As we are cooperating with retailers in customers' local market, we have good experience on stock, producing schedule, shipping plan with our customers. Because we believe, then we meet.

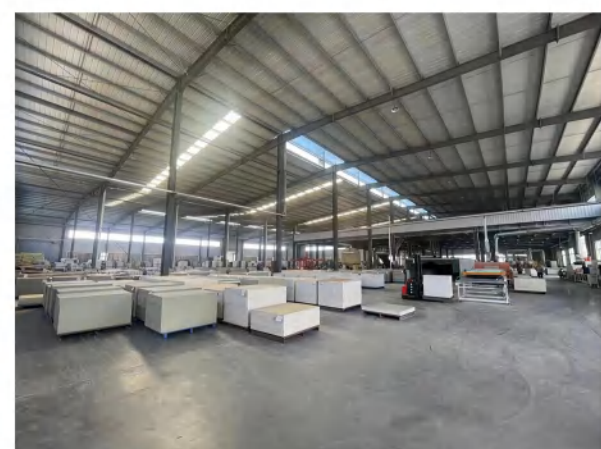

Qualification

As quality is the first to us, with exporting hundred of containers, we build a complete quality control system. Our QC team can inspect products parameters at first to compare with customer's requirements, with inspect item of UV coating, thickness, wear layer thickness, and color difference. Second we will make sure with safety loading and fix the pallets well into container, ensure container arrive port without any surprises. Because customer's believe, we are improving day by day with our customers.



Thickness test



Moisture test



surface peeling test



resistance test

Certification

Before selling flooring product, we have tested the products via SGS with ISO standard, it's available to our customers for their selling for personal end-user, projectors, etc... We deeply understand the important with products safety, not only update the products performance and function periodically, but satisfy to customers with different requirements in their local market construction material standard. Because we are connecting to various customers, we are taking our duty.

SGS

Test Report No. SHAE2210016301 Date: 22 Jul 2022 Page 2 of 5

Test Results:

Test Part Description:

Specimen No.: **SGS Sample ID** Description
 SR1 SHAE2210016301 Grayback solid sheet

Remarks:

- (1) 1 mg/kg = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (= < MDL)
- (4) "-" = Not Regulated

EN 71-3:2019+A1:2021 - Migration of certain elements (Category II for scraped off by material)

Test Method: With reference to EN 71-3:2019+A1:2021, analysis was performed by ICP-OES, IC-UV or LC-ICP-MS.

Test Item(s)	Unit	Limit	MDL	Result
Soluble Chromium (Cr-VI)	mg/kg	0.05	0.05	ND
Soluble Lead (Pb)	mg/kg	5	ND	ND
Soluble Arsenic (As)	mg/kg	5	ND	ND
Soluble Antimony (Sb)	mg/kg	5	ND	ND
Soluble Cadmium (Cd)	mg/kg	0.1	ND	ND
Soluble Barium (Ba)	mg/kg	1000	ND	ND
Soluble Calcium (Ca)	mg/kg	5	ND	ND
Soluble Chromium (Cr-III)	mg/kg	5	ND	ND
Soluble Mercury (Hg)	mg/kg	0.1	ND	ND
Soluble Selenium (Se)	mg/kg	0.1	ND	ND
Soluble Boron (B)	mg/kg	5	ND	ND
Soluble Cobalt (Co)	mg/kg	0.1	ND	ND
Soluble Manganese (Mn)	mg/kg	5	ND	ND
Soluble Strontium (Sr)	mg/kg	5	ND	ND
Soluble Zinc (Zn)	mg/kg	5	ND	ND
Soluble Copper (Cu)	mg/kg	5	ND	ND
Soluble Aluminum (Al)	mg/kg	5	ND	ND
Soluble Nickel (Ni)	mg/kg	0.1	ND	ND
Soluble Tin (Sn)	mg/kg	5	ND	ND
Soluble Organic Tin*	mg/kg	12	ND	ND

SGS

Test Report No. SHAE2210016301 Date: 22 Jul 2022 Page 5 of 5

Sample photo:

SGS authenticates the photo on original report only

*** End of Report ***

intertek

Test Report Issue Date: 2023-06-23 Intertek Report No.: Z302061259F-001

Test Item, Method and Result:

Class	Requirement - Test	Result - Remark	Verdict
4	Requirements	EN 15641:2004(A1):2006 Resilient, textile and laminate floor coverings Essential Characteristics	
4.1	Reaction to fire	Reaction to fire: The floor covering shall be tested and classified according to the requirements of EN 13501-1 and the resulting class and subclass (as appropriate to the class itself) shall be declared. Class E1 Reaction to fire class E1 Refer to test report in Appendix 9 (Issue by MS No. 3323)	P
4.3	Formaldehyde emission	When formaldehyde containing materials have been added to the product as a part of the production process, the product shall be tested and classified into one of two classes: E2 or E3. Class E2 Formaldehyde emission Class E2 Refer to test report in Appendix 9 (Issue by MS No. 3323)	P
4.5	Slip resistance	If a claim for slip resistance is made, the floor covering intended to be used in dry and non-contaminated conditions shall have a dynamic coefficient of friction of >= 0.30 when tested in dry under the conditions in accordance with EN 12893 and shall be declared as technical class DS. Class DS Dynamic coefficient of friction >= 0.41 Dynamic coefficient of friction >= 0.44 Dynamic coefficient of friction >= 0.44 Dynamic coefficient of friction >= 0.41	P

intertek

Test Report Issue Date: 2023-06-23 Intertek Report No.: Z302061259F-001

Appendix B - NB Report

ITC

INSTITUTE FOR TESTING AND CERTIFICATION
 1100 Yunnan Road, Linyi, Shandong Province, China
 276000

REPORT OF ASSESSMENT OF PERFORMANCE
 No. 15352049-1-2021

Product: Polypropylene PVC floor covering, 1800mm x 900mm x 4.0mm (3.0mm + 0.9mm) Sheet, 1200mm x 1800mm x 4.0mm Sheet

Project: Shandong Guangfeng Decoration Materials Co., Ltd. (Shandong Guangfeng Decoration Materials Co., Ltd. Shandong Guangfeng Decoration Materials Co., Ltd. Shandong Guangfeng Decoration Materials Co., Ltd.)

Assessed by: Jerrison Ma

Issued on: 2023-06-21


Number of pages: 9

Representative of the Notified Body No. 1023

► Applications Places



PERFORMANCE




Chemical Resistant



Anti Termite




Easy Maintenance



Waterproof




Stain Resistant



Antislip



Abrasion Resistant



All-Around Application



Flexible Material



Precisely Cut



Multiple Combination



Uneasily Scratched

► Process of getting our products

-1-

Free samples are available tell us what you need

-2-

Talk abtou products confirm Colors, quantities, specification, etc...

-5-

Load container after rece-iving 70% balance, ship goods from China

-4-


Lead time is around 15-20 days for 20ft container, send schedule to you

-3-

Confirm performa invoice, if no problem we need 30% deposit inadvanced

Vinyl Flooring

-Dry back type

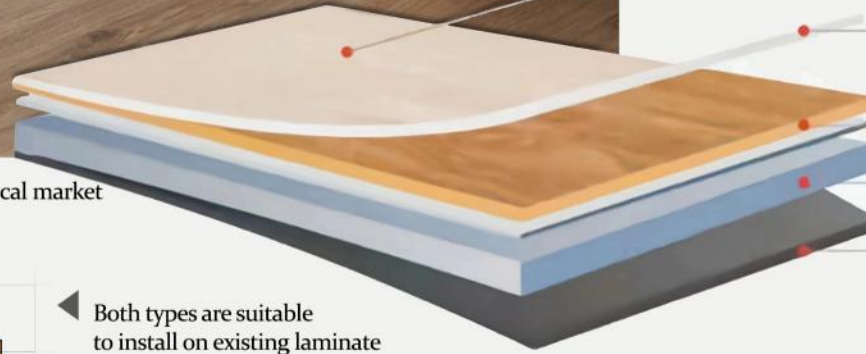

UV coating layer


Wear layer

PVC film

Middle layer

Bottom layer

▲ Advise to purchase pvc floor glue in local market

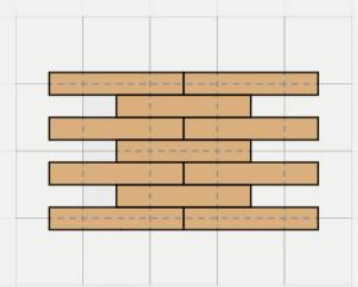

Regular style

Both types are suitable to install on existing laminate floor, timber floor, ceramic type, etc... Each installation please check with experienced installer, or installed by your own under well-instruction.



-Self adhesive type

UV coating layer



Wear layer

PVC film

Middle layer

Bottom layer

Glue layer

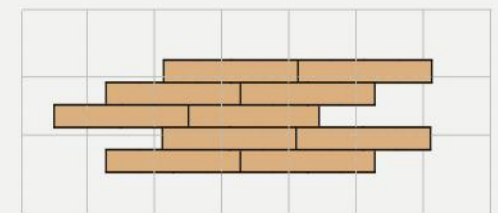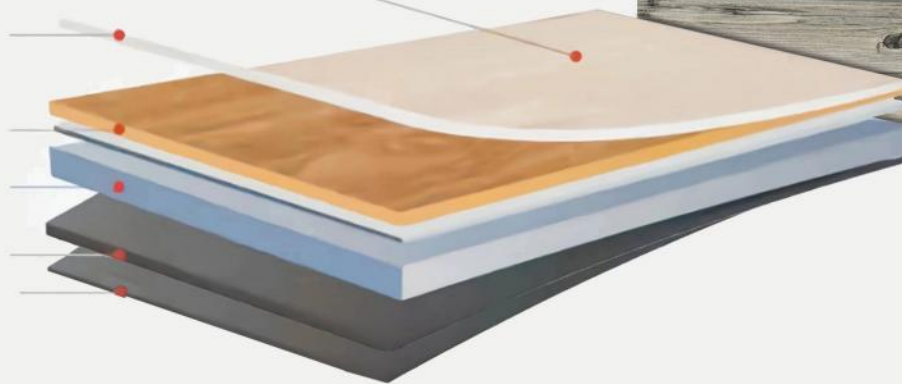

Boat style



Termite resistance



100% recyclable and eco friendly, saving forest



Weather resistant from 0°C to 60°C



Water resistance and mildew proofing



No need heavy clean



Excellent UV resistance



DIY and easy installation



Formaldehyde emission: E0 (the highest standard)




Stock colors V series wooden

Size option-1: 1220*180mm*1.8mm/2.0mm/2.5mm/3.0mm

Wooden grain

Size option-2: 914.4*152.4mm*1.8mm/2.0mm/2.5mm/3.0mm

Focus on floor decoration materials

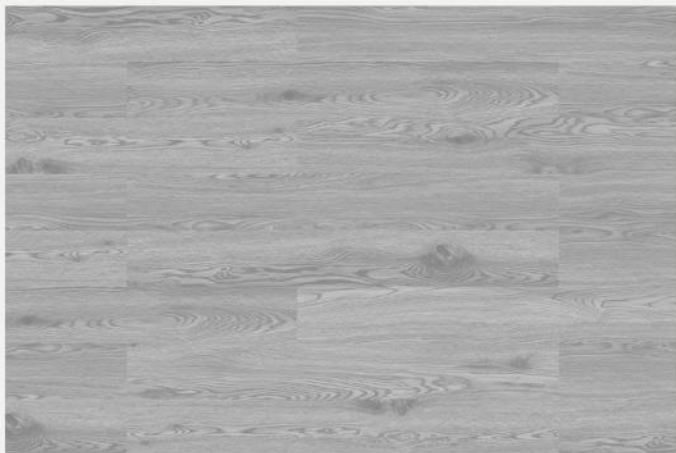

V003



V005



V007



V009



V011



V012



▶ Colors are available on dry back type & self adhesive type

◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching



Scan with qr code for widely choosing on colors, or copy the link https://www.720yun.com/t/34vk6w7yOdl?scene_id=102781854



Stock colors V series wooden

Size option-1: 1220*180mm*1.8mm/2.0mm/2.5mm/3.0mm

Wooden grain

Size option-2: 914.4*152.4mm*1.8mm/2.0mm/2.5mm/3.0mm

Focus on floor decoration materials



V023



V025



V028



V039



V062



V069



▶ Colors are available on dry back type & self adhesive type

◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching



Scan with qr code for widely choosing on colors, or copy the link
https://www.720yun.com/t/34vk6w7yOdI?scene_id=102781854



Stock colors V series wooden

Size option-1: 1220*180mm*1.8mm/2.0mm/2.5mm/3.0mm

Wooden grain

Size option-2: 914.4*152.4mm*1.8mm/2.0mm/2.5mm/3.0mm

Focus on floor decoration materials



V074



V089



V124



V310



V324



▶ Colors are available on dry back type & self adhesive type

V069



◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching




Scan with qr code for widely choosing on colors, or copy the link
https://www.720yun.com/t/34vk6w7yOdl?scene_id=102781854

-LVT click type

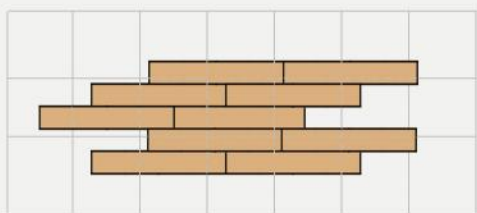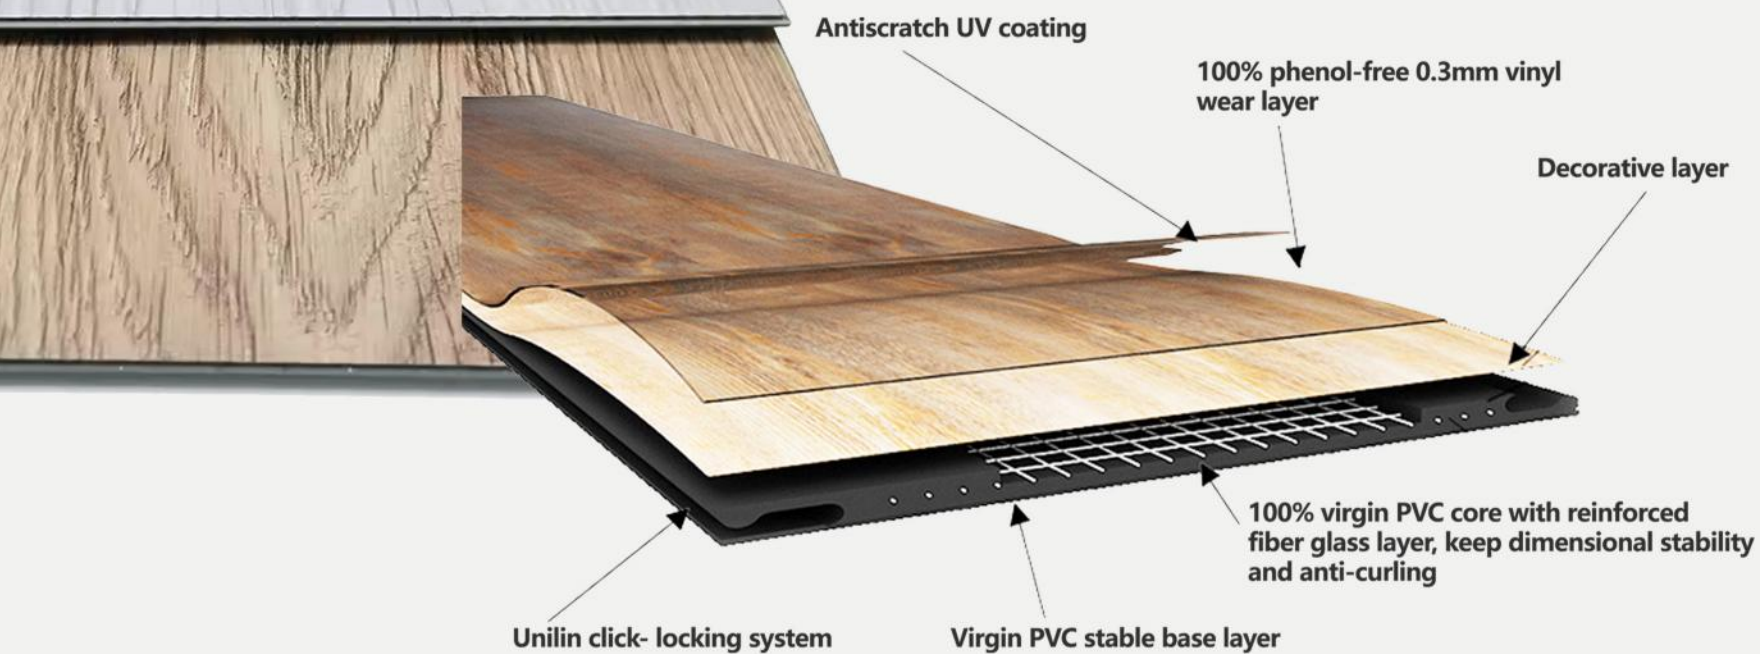

Boat style

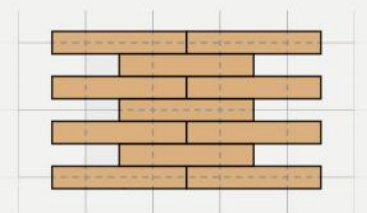

Regular style

- ▶ Flexible click to install the flooring on your existing leveled floor
- ▶ Installation should be under well-trained or instruction



Termite resistance



100% recyclable and eco friendly, saving forest



Weather resistant from 0°C to 60°C



Water resistance and mildew proofing



No need heavy clean



Excellent UV resistance



DIY and easy installation



Formaldehyde emission: E0(the highest standard)

Stock colors L 4mm series wooden



Size option-1: 1220*180mm*4.0mm

Focus on floor decoration materials Wooden grain



L1003



L1006



L1009



L1015



L1019



L1022



◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching

✉ info@mishadecor.com

Stock colors L 4mm series wooden



Size option-1: 1220*180mm*4.0mm

Focus on floor decoration materials Wooden grain



L1033



L1086



L1806



L1816



L1820



L1825






◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching

✉ info@mishadecor.com


SPC flooring

-Click lock system

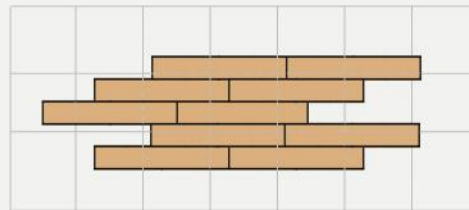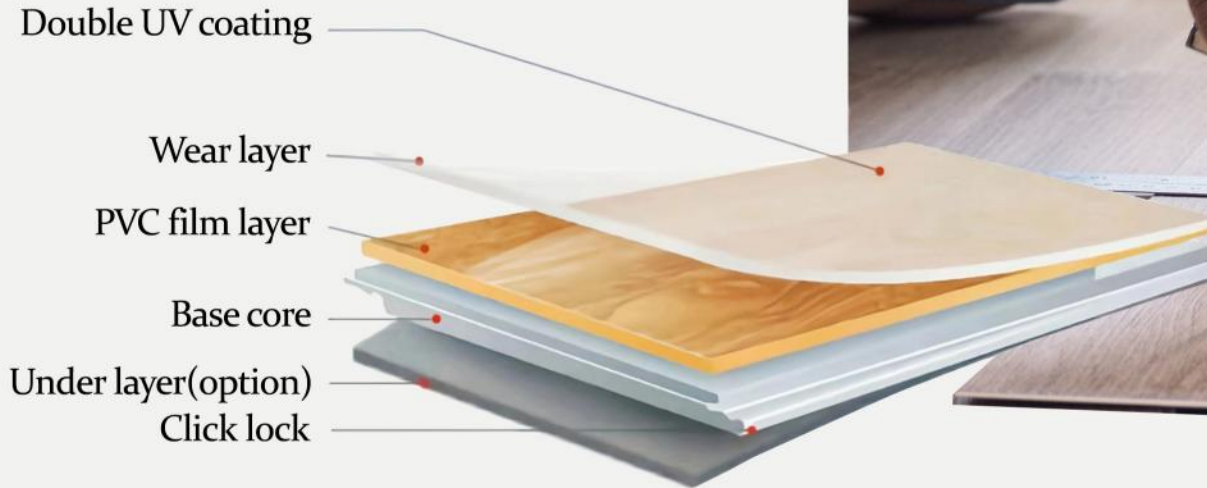

◀ For the click lock system, flooring installation is becoming easily. Reduces the cost of labor, economic choose for residential and commercial.

◀ Two types of installation are normal installation, please install it under well-trained or instruction. When the flooring tolerance is too large at a certain position, it is necessary to reposition the gap.



◀ For purchasing this click flooring, always need special size 640*128mm, 900*150mm.

◀ This type of installation is special installation, please install via professional installer.

⌚ 4mm spc click flooring with quality assurance of 15 years light commercial, 20 years of residential.

⚠ Notes: Pictures in this catalogue for reference only, because screen of devices are different, colors show different on different devices.(this catalogue color is based on 75% lightness reach exact color). Please consult with the real products if you need to confirm in real.



Termite resistance



100% recyclable and eco friendly, saving forest



Weather resistant from 0°C to 60°C



Water resistance and mildew proofing



No need heavy clean



Excellent UV resistance



DIY and easy installation



Formaldehyde emission: E0(the highest standard)

Stock colors H series wooden



Size option-1: 1220*180mm*4.0mm(regular)

Size option-2: 640*128mm*4.0mm(herringbone)

Focus on floor decoration materials Wooden grain



H1942



H1943




H1944



H1948



H1955

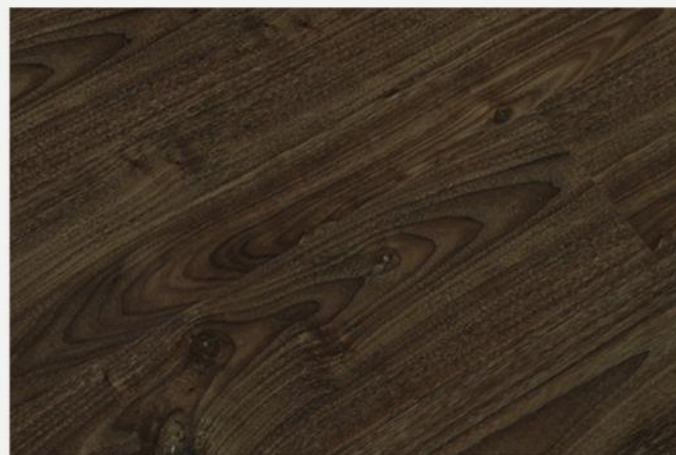

H1956



◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching

✉ info@mishadecor.com


Stock colors H series wooden



Size option-1: 1220*180mm*4.0mm(regular)

Size option-2: 640*128mm*4.0mm(herringbone)

Focus on floor decoration materials Wooden grain

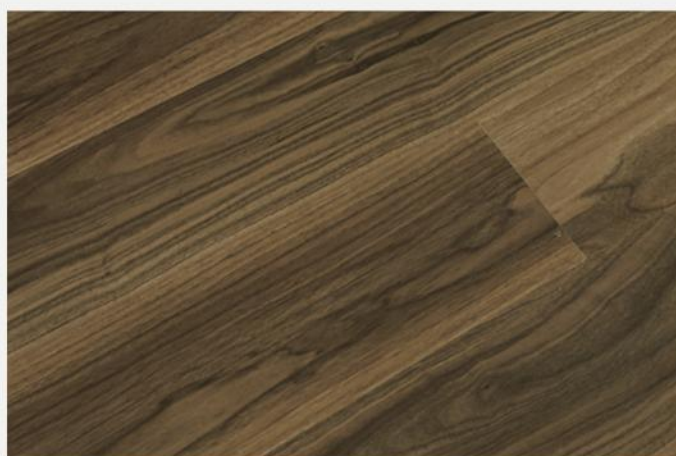

H1957




H1964



H1964AB



H2002

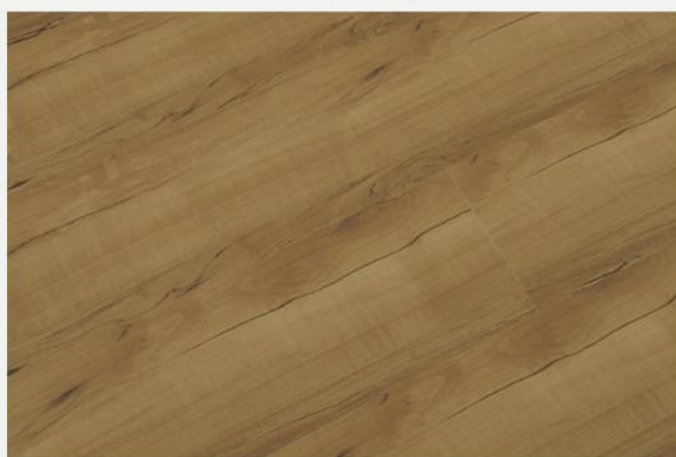

H2003



H2006



◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching

✉ info@mishadecor.com

Stock colors H series wooden



Size option-1: 1220*180mm*4.0mm(regular)
Size option-2: 640*128mm*4.0mm(herringbone)

Focus on floor decoration materials Wooden grain



H2008



H2009




H2010



H2011



H2012

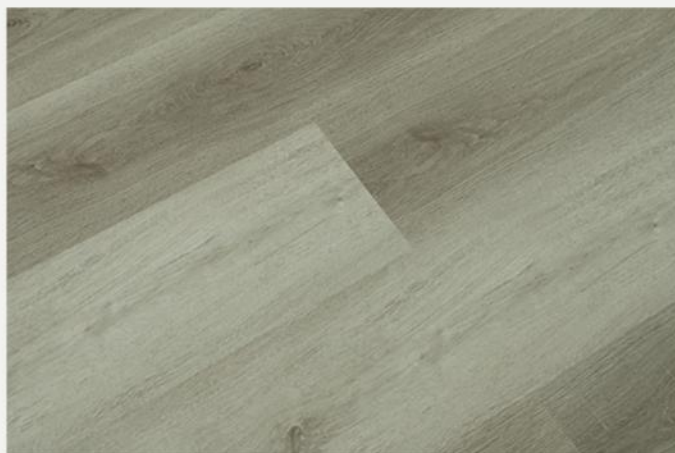

H2013



◀ Other size & thickness are available, for the exact package details depending on your requirements, please contact us for more information

◀ If you have own color or project color, welcome to contact us for matching

✉ info@mishadecor.com

Flooring accessories

-Skirting type



PVC Skirting 85mm

Advantage of low cost & easy installation, durable and nice looking.



SPC Skirting 90mm

Advantage of tough design & easy installation, durable and elegant looking.



PS Skirting 100mm

Advantage of pure color design & easy installation, durable and elegant looking.



► Other designs or flooring accessories if it's needed, please consult for details.

-Acrylic & Silicon

ACRYLIC CAULK SEALANTS

Description:

Acrylic based, one component, paintable, flexible, filling and bonding material.

Application area Description:

Used indoor and outdoor for repairing small cracks and grouting. PVC, aluminium, closets, tiles, ceramics, joints, connections and installation of wooden panels. Sound, water and dust insulation of vehicles.

- Paintable crackproof flex sealant that seals joints up to 3 in.
- Formulated to stretch over 600% without losing adhesion
- Ideal for general purpose, interior and exterior projects



PU LIQUID NAIL

POLYURETHANE BASED:

PU Liquid Nail is one part, solvent-free, moisture curing polyurethane based construction adhesive with outstanding resistance to water, heat and weathering conditions.

Fields of Application:

Variety of materials can be bonded without nails and screws. Powerful bonding of wood products chipboard, plywood, staircase renovation, corner connections in metal door, fire proof fibreboard and plasterboard, mouldings, doors and window frames, plaster moldings, corniches, ceiling accessories, wooden wardrobes, bonding and insulating of expanded polystyrene and polyurethane sheets, windows, facades, stones, natural stones, bricks and ceramics, aluminium, stainless steel, galvanised steel, copper, PVC and reinforced plastics.

WATERPROOF



Maintenance/support/installation

PVC Vinyl flooring/Spc flooring

Our product is provided with a protective layer of UV coating that protects against intrusion of dirtiness and makes its maintenance easier. After installation, you only need to clean the floor with a damp mop with cleaning agent suitable for PVC floors with UV protective layer. No other lacquering or waxing is necessary. In specific cases of use with high load factor or where extreme maintenance conditions are imposed, we suggest applying another protective layer of suitable agent for vinyl floors with UV protective layer. Use agents suitable for PVC with wear layer only. Follow instructions of the manufacturer of agents and possibly consult them with technical advisors. For regular cleaning, do not use any aggressive agents or agents reducing surface tension of water (e.g. regular detergents, agents with abrasives, alkalis or high content of organic solvents and degreasing substances). Dirtiness behaves as sandpaper and may damage your floor! Dust and dirt are removed manually using the right means (dry sweeping mop, vacuum cleaner) and methods (sweeping or vacuuming). Perform regular cleaning under dry or wet conditions using suitable neutral agents.



Spilled liquids must be wiped away immediately



Easy to clean dust with different methods




Easy to clean dust with different methods



Easy to clean dust with different methods

Online support

Whether you are in need of further product or technical specifications, have a query about our ranges or just require some interior design inspiration, we have a variety of online tools you can navigate through easily to find exactly what you are looking for.

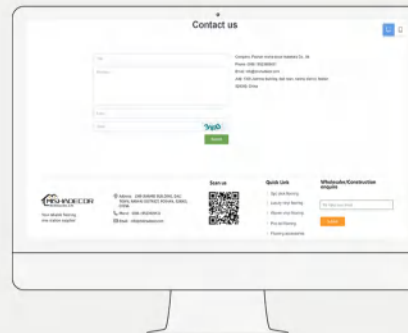


Contact us via our homepage or cell phone number



Free sample

We provide all series of flooring samples free charge except delivery cost, if necessary, please contact us

Different installation style on plank

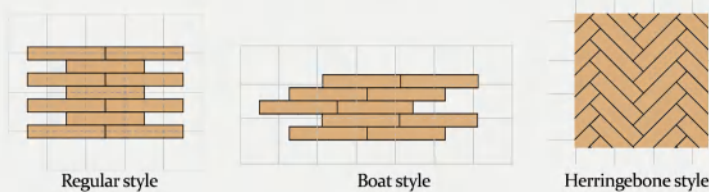

The situation of existing floor should be



Installation

Home decoration environment, with small single space area, which is suitable to install pvc/spc flooring.

First, choose the appropriate flooring scheme according to the selected product color and pattern.

Before flooring, the installation personnel should measure the length and width of the site and select a flooring process based on the actual conditions.

When flooring, start from the middle of the room, or floor from the side of the most important reference wall. Before formal flooring, conduct pre-flooring to determine the flooring direction, and then floor from parallel to the wall until the last row.

For places with heavy traffic, local microadhesive installation or double-sided adhesive tape installation can be selected in this area. When the one-way length exceeds 6 meters, adhesive or double-sided adhesive tape with a width of 50cm can be applied at the bottom, perpendicular to the flooring direction of the floor, as a local fixation to use.

Tree type content



Oak



Pine wood



Teak wood



Walnut



Maple wood



Eucalyptus



Cherry



Elm wood

► Stock colors are based on the above wood type to make different designs.

